


News from the dryspin® test lab

dryspin® lead screw systems vs. the competition

Wear after 400,000 cycles

Test parameters: 140 mm stroke; 100 rpm; 200N load; no added lubricant; non-coated lead screw

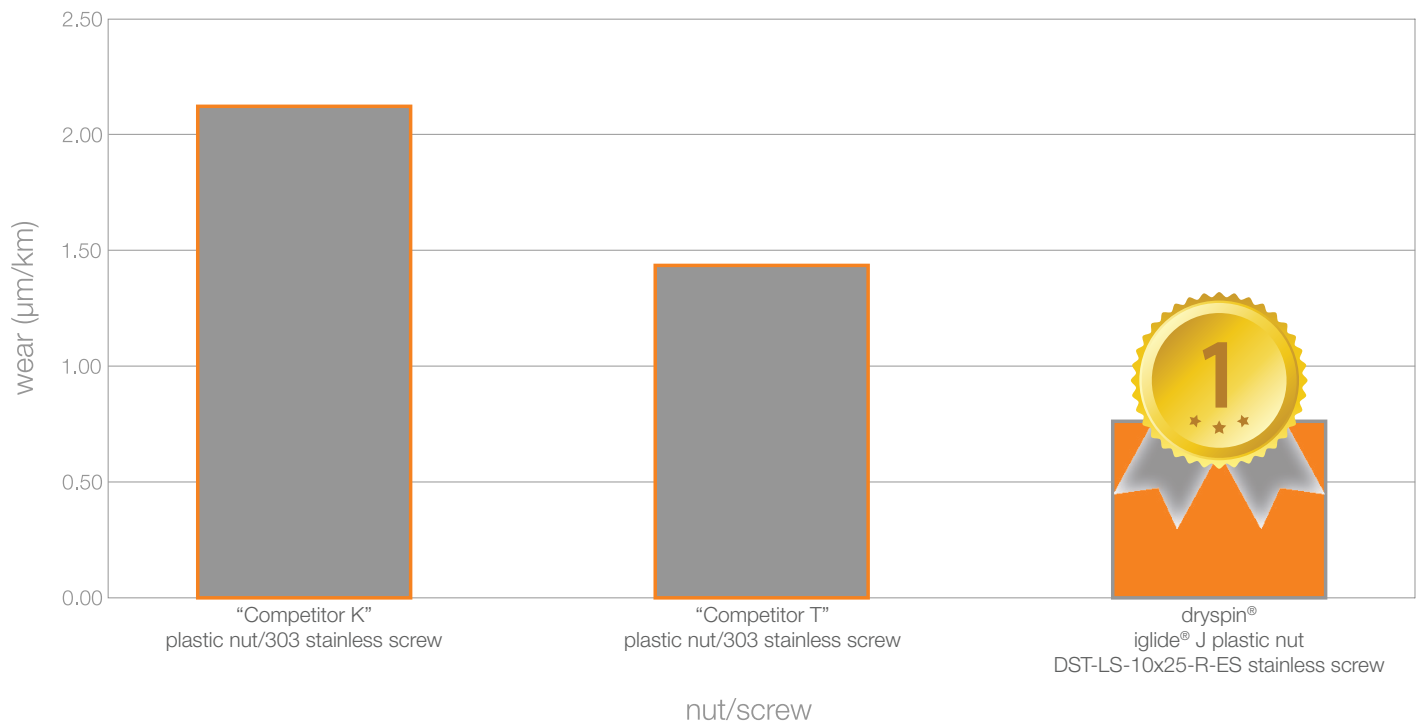

Nut and screw efficiency

Test parameters: 140 mm stroke; 100 rpm; 200N load; no added lubricant; non-coated lead screw

